

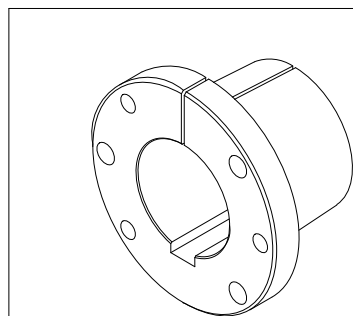


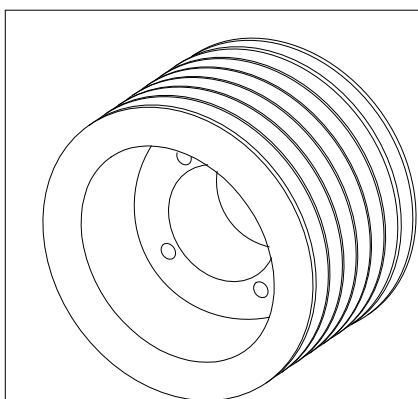

3 - M16 PROF. 55mm
EQUIDISTANTES

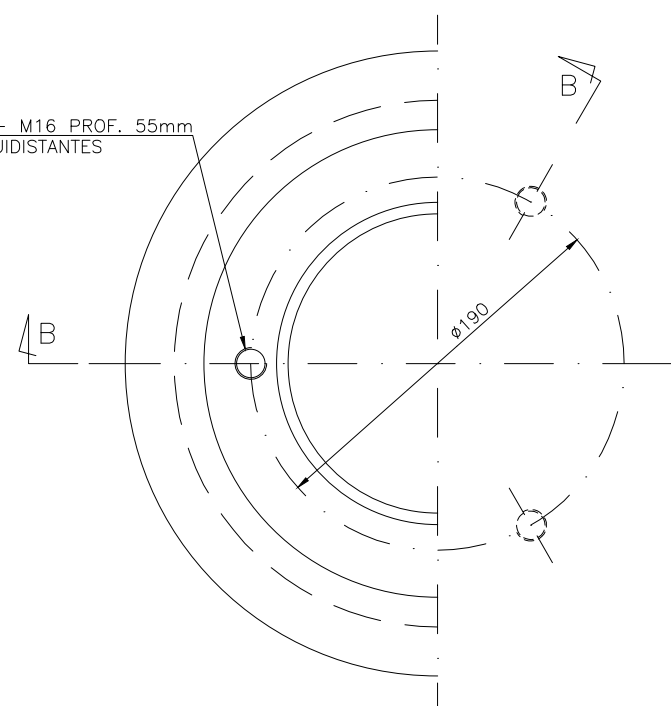

PESO TOTAL: 198,8Kg

TOLERÂNCIAS ADMISSÍVEIS PARA DIMENSÕES SEM INDICAÇÃO (DIN 7168)													
DE ATE	0,3 3	3 6	6 30	30 120	120 315	315 1000	1000 2000	2000 4000	4000 8000	8000 12000	12000 16000	16000 20000	20000 60000
PRECISA	+0,05	+0,05	+0,1	+0,15	+0,2	+0,3	+0,5	+0,8	—	—	—	—	—
MÉDIA	+0,01	+0,1	+0,2	+0,3	+0,5	+0,8	+1,2	+2	+3	+4	+5	+6	+8
GROSSA	+0,15	+0,2	+0,5	+0,8	+1,2	+2	+3	+4	+5	+6	+7	+8	+12
MUITO GROSSA	—	+0,5	+1	+1,5	+2	+3	+4	+6	+8	+10	+12	+12	

RUGOSIDADE DE SUPERFÍCIES (DIN 3141)												
SÍMBOLOS ISO												
GRUPOS DE RUGOSIDADES (ANTIGO)												
RUGOSIDADE MÁXIMA VALORES EM Ra (µm)	50			6,3			0,8			0,1		
CLASSES DE RUGOSIDADES	N12	N11	N10	N9	N8	N7	N6	N5	N4	N3	N2	N1
RUGOSIDADE MÁXIMA VALORES EM Ra (µm)	50	25	12,5	6,3	3,2	1,6	0,8	0,4	0,2	0,1	0,05	0,025



USAR BUCHA ELÁTICA - ITEM 49 - VER NOTA 7

[illegible]