


PN: SOQUETE CUNHA 1.1/2 - 37MM - 39MM 30T 5:1 OWS9 B

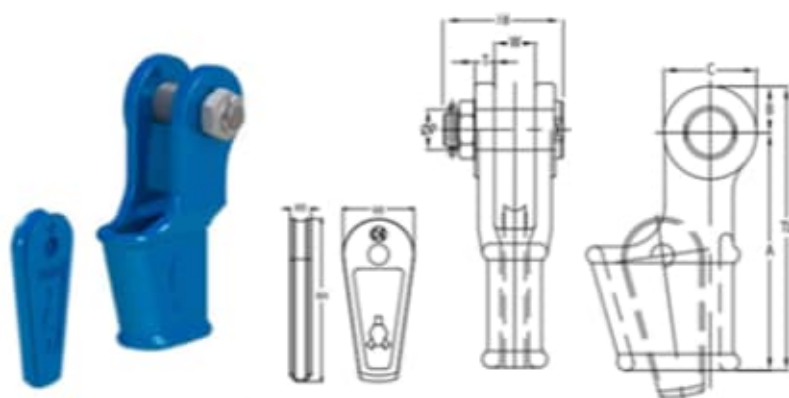

Model No.	MBL [US tons]	for wire ø		Dimensions (inch)												Weight (lbs)
		(mm)	(inch)	A	B	C	øP	T	TL	TS	W	WH	WB	WD		
OWS 0.25 B	9	7-8	5/8	4.33	0.71	1.42	0.63	0.35	5.04	2.44	0.71	2.74	1.38	0.33	2	
OWS 0.5 B	13	9-10	3/4	5.71	0.91	1.81	0.81	0.43	6.61	2.95	0.81	2.91	1.42	0.47	4	
OWS 1 B	22	11-13	1	5.75	1.12	2.24	0.98	0.47	6.87	3.15	0.98	4.53	1.89	0.55	5	
OWS 2 B	28	14-16	1 1/4	6.93	1.38	2.76	1.18	0.59	8.31	3.78	1.22	5.30	2.24	0.71	9	
OWS 3 B	44	18-19	1 1/2	8.27	1.57	3.15	1.38	0.63	9.84	4.21	1.50	6.30	2.76	0.83	15	
OWS 4 B	61	20-22	1 3/4	9.35	1.87	3.74	1.61	0.71	11.22	4.84	1.73	7.34	3.03	0.94	22	
OWS 5 B	83	23-26	2	10.83	2.17	4.33	2.01	0.87	12.99	5.43	2.01	8.33	3.27	1.08	33	
OWS 6 B	99	27-29	2 1/8	12.20	2.56	5.12	2.24	0.98	14.76	6.30	2.24	9.11	3.58	1.18	46	
OWS 7 B	121	30-32	2 1/4	13.78	2.87	5.75	2.48	1.10	16.63	6.30	2.48	10.47	4.25	1.30	68	
OWS 8 B	139	34-36	2 3/8	15.25	3.28	6.83	2.73	1.25	18.68	7.09	2.73	11.75	4.57	1.50	82	
OWS 9 B	165	37-39	2 1/2	17.72	3.15	5.39	2.76	1.18	20.87	7.91	3.03	13.31	5.12	1.50	112	
OWS 10 B	187	40-42	2 5/8	19.69	3.43	6.30	2.99	1.30	23.11	8.23	3.29	14.67	5.51	1.61	141	
OWS 11 B	248	43-48	3 1/4 - 1	21.65	3.94	7.32	3.30	1.54	25.39	9.33	3.50	16.06	5.75	1.89	212	
OWS 12 B	309	49-52	2	25.20	4.13	8.07	3.74	1.81	29.33	10.35	3.98	17.72	6.30	2.09	287	
OWS 13 B	357	54-58	2 1/4	25.98	4.92	9.84	4.25	2.13	30.91	11.73	4.49	18.50	6.61	2.28	397	
OWS 14 B	468	60-68	2 1/2	32.87	5.31	10.83	4.78	2.38	38.19	12.99	5.00	19.88	6.93	2.56	606	
OWS 15 B	507	72-74	3	38.37	5.91	11.81	5.24	2.99	45.28	14.96	5.75	21.65	9.61	2.76	970	
OWS 16 B	689	81-86	3 1/4 - 3	43.31	5.91	11.81	5.51	3.11	49.21	15.63	6.26	26.38	10.24	3.15	1124	

MBL = Minimum Breaking Load